

WS-G60 series portable industrial endoscope




Professional industrial endoscope solution supplier

To be as your wish

More efficient detection

WS-G series is equipped with a number of inspection functions, advanced technology and comprehensive functions, which can be used in automobile inspection, pipeline inspection, electrical inspection and other fields

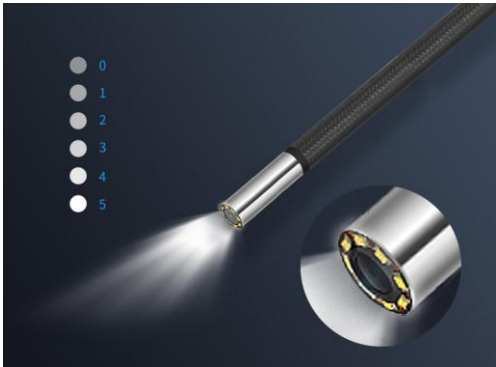

LED integrated lighting, sufficient light source



Multiple pipelines are available



Quick pipeline replacement



Combined battery, easy to disassemble



5 inch large screen, more convenient to watch



WIFI Wireless Transmission (optional)


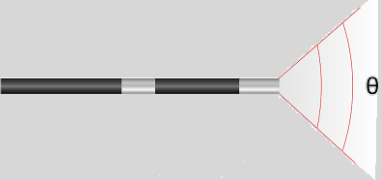



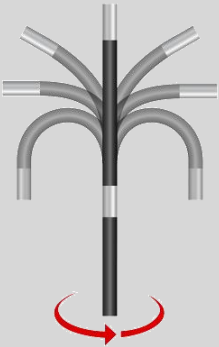

Host	Dimension	350*155*59mm
	Display	5 inch industrial touch LCD screen
	Output port	HDMI video output, Micro USB、TF card slot
	Storage	32G
	Power	Special rechargeable lithium battery pack, online charging, battery life \cong 4 hours
	IP grade	IP54
	Working temperature	-10℃~50℃
	Storage temperature	-20℃~60℃
	Relative humidity	Max 95% , No condensation
System	Operation System	Multifunctional operating system
	Operation method	Button navigation, dual camera and video buttons
	Support Function	With freeze, zoom, photo, flip, video playback, analog ruler functions
	File Format	Image:JPEG (JPG), Video:AVI
	Support Language	Chinese (Simplified and Traditional), French, English, German, Spanish, Italian, Japanese
Packing Case	Weight	3.9kg
	L*W*H	47.9*38.7*15.5cm

Camera and Probe











There are several length and diameter for WS-G60 series for you to chose according to your requirement.

Model		WS-G60							
		WS-G6010	WS-G6020	WS-G6030	WS-G6040	WS-G6050	WS-G6060	WS-G6070	WS-G6080
Lens	Direction	Front view							
	FOV(θ)	120°							
	(DOF)	10mm~120mm							
	Pixels	1000,000pixels							
	Illumination	LED Integrated lighting							
Probe	Lenght(L)	12.5 \pm 0.5mm							
	Diameter(D)	6mm							
	Articulation	360°Omnidirectional head							
	Bend angle(α)	160° \pm 10°			150° \pm 10°	130° \pm 10°	120° \pm 10°	110° \pm 10°	100° \pm 10°
	IP grade	IP67							
	Working temperature	-20℃~70℃							
Insert tube	Lenght	1m	2m	3m	4m	5m	6m	7m	8m
	Materials	Flexible (tungsten braided tube)							

WS-G (Front view)

Direction of the lens	
FOV(θ)	
DOF	
Probe length(L)	
Probe Diameter(D)	
360° articulation	
Bend angle(α)	

Packing list

No	Name	PCS	Unit	Photos
1	Host	1	set	
2	Battery	1	pcs	
3	Packing Case	1	pcs	
4	Memory	1	pcs	
5	Card reader	1	pcs	
6	Tripod	1	pcs	
7	USB Cable	1	pcs	
8	HDMI cable	1	pcs	
9	Charger	1	pcs	
10	Warranty card	1	pcs	
11	User manual	1	pcs	
12	Guarantee Card	1	pcs	